



ROYO MACHINERY

Tape Applicator Machines

DMHA-520 Double Sided Tape Applicator Machine

USD5800, with 2 Tape Heads



Main performance and features:

- Used for applying the double sided tape ,sealing tape and PVC tape on the envelope, A4 paper, carton box, PVC material, decoration material and so on.
- It is widely used in building materials, packaging, printing and many other industries.
- Instead of manual operation, and saving the labor force.
- It's light and flexible, convenient to move, PLC programming, touching screen, operation simple.

Specifications:

Model	DMHA-520
Max product width	90~500mm
Machine speed	30m/ min
PLC Language	English, Spanish,Russia, Japanese
Electrical need	110-220V,50HZ
Material	Envelope, A4 paper, carton box, PVC and etc.
Max material thickness	20mm
Max number of spots in line	4
Min tape length	35mm
Min distance between application and the next	25mm
Internal diameter roll tape	76mm
Tape width	5mm up to 33mm
Tape applicator/taping head	1, 2, 3, or 4
Minimum Product Thickness	100gsm
Weight	110kg
Dimension	900x850x1650mm (LxWxH)
Warranty	12 Months

DMHA-1060 Double Sided Tape Applicator Machine

USD6900, with 2 Tape Heads



Specifications:

Model	DMHA-1060
Max product width	90~1000mm
Machine speed	30m/ min
PLC Language	English, Spanish,Russia, Japanese
Electrical need	110-220V,50HZ
Material	Envelope, A4 paper, carton box, PVC and etc.
Max material thickness	20mm
Max number of spots in line	4
Min tape length	35mm
Min distance between application and the next	25mm
Internal diameter roll tape	76mm
Tape width	5mm up to 33mm
Tape applicator/taping head	1, 2, or 3
Minimum Product Thickness	100gsm
Weight	170kg
Dimension	1300x850x1650mm (LxWxH)
Warranty	12 Months

DMHA-1420 Double Sided Tape Applicator Machine


USD8050, with 2 Tape Heads



Specifications:

Model	DMHA-1420
Max product width	90~1400mm
Machine speed	30m/ min
PLC Language	English, Spanish,Russia, Japanese
Electrical need	110-220V,50HZ
Material	Envelope, A4 paper, carton box, PVC and etc.
Max material thickness	20mm
Max number of spots in line	4
Min tape length	35mm
Min distance between application and the next	25mm
Internal diameter roll tape	76mm
Tape width	5mm up to 33mm
Tape applicator/taping head	1, 2, 3, 4, 5, 6, 7 or 8
Minimum Product Thickness	120gsm
Weight	205kg
Dimension	1800x1900x1470mm (LxWxH)
Warranty	12 Months

DA-4/DA-30/DA-60 Tape Head
 USD1500/USD1500/USD2200

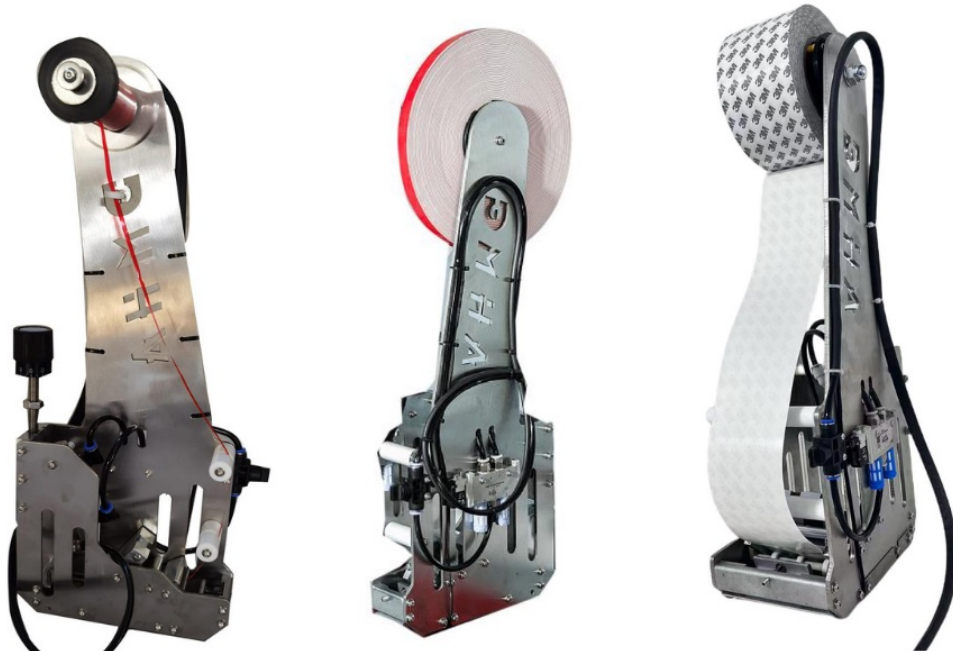

Specifications:

Max outer diameter roll tape	400mm
Tape width	4mm~6mm/5mm to 33mm/10~60mm
Magnet valve	24 volt DC
Compressor air	6bar
Weight	5. 5 kgs

DMHA-A800 Automatic Double Sided Tape Applicator Machine

USD11000, with 2 Tape Heads



Main performance and features:


- Automatic positioning and paper feeding mode is adopted.
- The fitting part adopts the new type of adhesive mechanism, which has the high efficiency of fitting. The length of the fitting adopts man-machine dialogue, and the length can be set at will.
- The double-sided tape cut is a toothed type.
- Imported electrical components are used in key parts to ensure equipment stability.
- Full-time fault warning display device, touch screen operation control.
- According to the different products, it is easy to select and expand the required functions

Specifications:

Model	DMHA-A800
Max product width	100~800mm
Machine speed	55m/ min
PLC Language	English, Spanish,Russia, Japanese
Electrical need	110-220V,50HZ
Material	Envelope, paper, carton box, PVC and etc.
Max material thickness	180g~7mm
Max number of spots in line	4
Min tape length	35mm
Internal diameter roll tape	76mm
Tape width	5mm~33mm, 10mm~60mm, 10mm~100mm
Tape applicator/taping head	1, 2, 3, 4
Accuracy	±2mm
Weight	850kg
Dimension	3000x1650x1600mm (LxWxH)
Warranty	12 Months

DMHA-A500 Automatic Double Sided Tape Applicator Machine

USD8500, with 2 Tape Heads

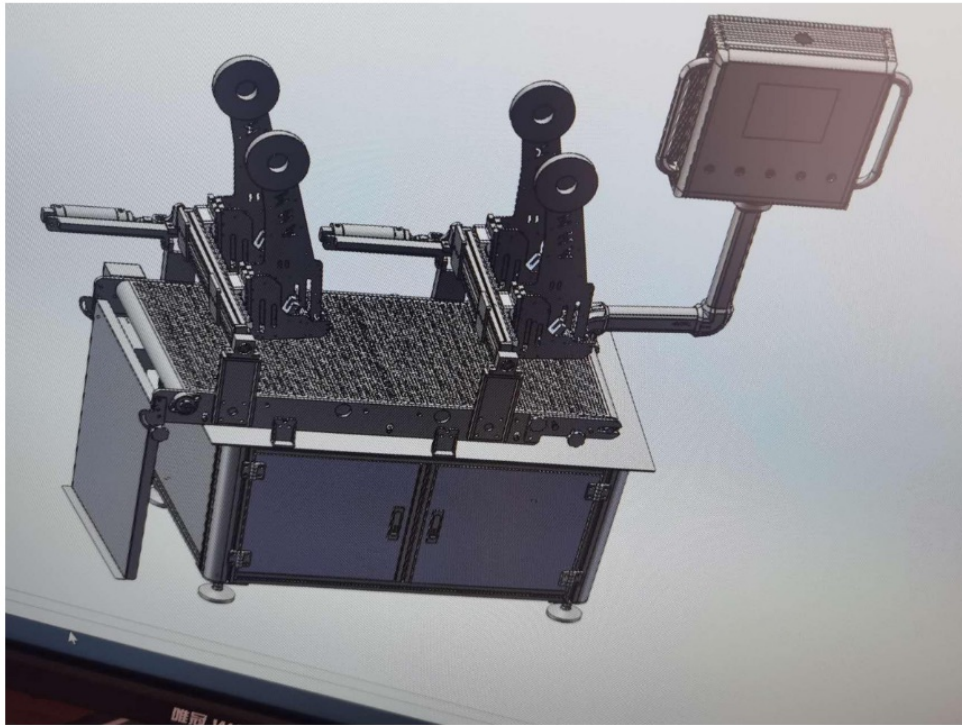

Specifications:

Model	DMHA-A500
Max product width	100~500mm
Machine speed	55m/ min
PLC Language	English, Spanish,Russia, Japanese
Electrical need	110-220V,50HZ
Material	Envelope, paper, carton box, PVC and etc.
Max material thickness	180g~7mm
Max number of spots in line	4
Min tape length	35mm
Internal diameter roll tape	76mm
Tape width	5mm~33mm, 10mm~60mm, 10mm~100mm
Tape applicator/taping head	1, 2, 3, 4
Accuracy	±2mm
Weight	650kg
Dimension	2500x1650x1600mm (LxWxH)
Warranty	12 Months